


CHERUBINI
tocco italiano dal 1947

TRONIC RX



The complete range for rolling shutters.



Tronic RX

The complete range
for rolling shutters.



- > **Motors with electronic limit switch, built-in receiver and wire control.**
- > **A series of versatile motors, available in different sizes and power ratings.**

The Tronic RX range has been designed to activate all types of rolling shutters.

Tronic RX motors combine simplicity of use and programming and protection capable of ensuring the highest levels of comfort, safety and reliability.


- > **Specific functions**

- Manual and semi-automatic adjustment of the limit switch.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorizing an intermediate position.
- Setting possible with remote control or wired switch.

Tronic RX

- > Manual and semi-automatic adjustment of the limit switch


- > Protection against freezing




- > Obstacle detection on both directions, sensitivity setting on 3 levels possible



- > Setting possible with remote control or wired switch

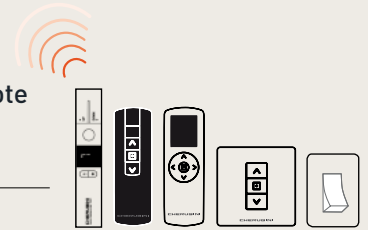

- > Possibility of memorizing an intermediate position



- > **Highest level of anti-burglary security**
The Secureline system permits motor reset only through the auxiliary cable, which is not accessible from outside the home.

Tronic RX Ø35

- > Function "super-sensitivity" on obstacle detection, set by remote control, setting on 3 levels possible.

Tronic RX Ø45

- > Thanks to the head with sintered steel clamp, the motor may be mounted directly on the aluminium side pin (up to 15 Nm).


Tronic RX

Main characteristics

Ø35

Code	Head	Torque	Speed	L (mm)	Certifications
AER35052100	Plastic material	5 Nm	21 rpm	547	CE
AER35091600	Plastic material	9 Nm	16 rpm	547	CE


Dimensions

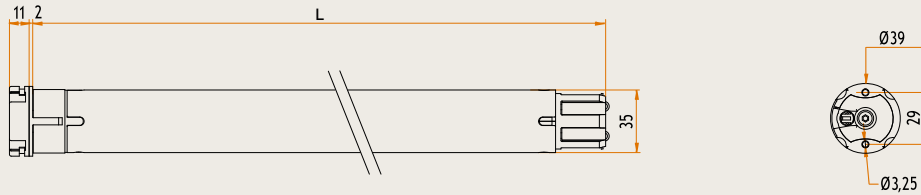

Ø45

Code	Head	Torque	Speed	L (mm)	Certifications
AER45061700	Plastic material	6 Nm	17 rpm	546	CE, D'E, M, NF
AER45101700	Plastic material	10 Nm	17 rpm	546	CE, D'E, M, NF
AER45151700	Plastic material	15 Nm	17 rpm	546	CE, D'E, M, NF
AER45251700	Plastic material	25 Nm	17 rpm	586	CE, D'E, M, NF
AER45321700	Plastic material	32 Nm	17 rpm	586	CE, D'E, M, NF
AER45401700	Plastic material	40 Nm	17 rpm	586	CE
AER45501200	Plastic material	50 Nm	12 rpm	586	CE

Dimensions

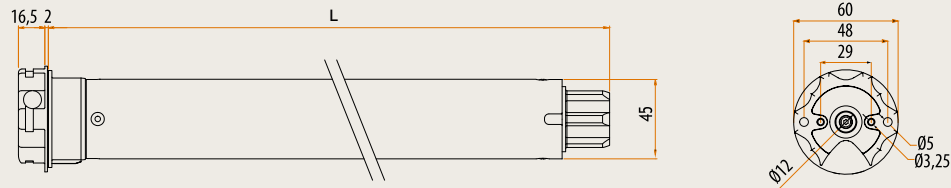


Tronic RX

Main characteristics

Ø58

Code	Head	Torque	Speed	L (mm)	Certifications
AER58061700	Plastic material	65 Nm	17 rpm	646	CE
AER58081700	Plastic material	85 Nm	17 rpm	646	CE
AER58101100	Plastic material	100 Nm	11 rpm	646	CE
AER58121100	Plastic material	120 Nm	11 rpm	646	CE

Dimensions

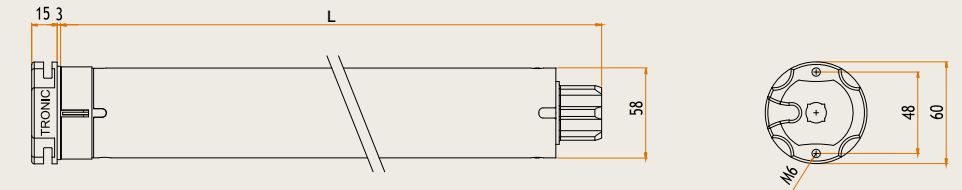

Compatible system

Tronic RX

All Cherubini remote controls

Domotic transmitter

Blue Bus / Blue Bus RX

Motor wire



CHERUBINI

tocco italiano dal 1947

CHERUBINI S.p.A.

Via Adige 55
25081 Bedizzole (BS) / Italy
Tel. +39 030 6872.039
Fax +39 030 6872.040
info@cherubini.it
www.cherubini.it

<http://www.linkedin.com/company/cherubini-spa>
<http://www.facebook.com/CherubiniSpa/>
<http://www.youtube.com/user/CherubiniSpa>



CHERUBINI France S.a.r.l.

ZI Du Mas Barbet
165 Impasse Ampère
30600 Vauvert / France
Tel. +33 466 77 88 58
Fax +33 466 77 92 32
info@cherubini.fr
www.cherubini.fr

CHERUBINI Iberia S.L.

Avda.Unión Europea 11-H
Apdo.283 - P.I. El Castillo
03630 Sax. Alicante / Spain
Tel. +34 966 967 504
Fax +34 966 967 505
info@cherubini.es
www.cherubini.es

CHERUBINI Deutschland GmbH

Siemensstrasse 40
53121 Bonn / Germany
Tel. +49 (0) 228 962 976 34 - 35
Fax +49 (0) 228 962 976 36
info@cherubini-group.de
www.cherubini-group.de

CHERUBINI DongGuan Ltd

Add.: No.4 Building,
BaoMa Road - ShuiBian
HengLi - DongGuan / China
Tel. +86 (0) 769 8337 3981
Fax +86 (0) 769 8337 2896
info@cherubini.cn
www.cherubini.it

CHERUBINI Türkiye

Ritim Istanbul
D-100 Güney Yanyolu
Cevizli Mahallesi, Zuhul Caddesi
34846 Maltepe - Istanbul / Turkey
Tel/Fax +90 (0) 216 515 6287
info@cherubini.com.tr
www.cherubini.com.tr