



# The new Venetian blind system.

### **DOGE**

the solution for Venetian blinds with tubular motor and specific tilter.

EXPECT **MORE** 







CHERUBINI

# Tubular innovation.

A revolutionary approach to traditional systems opens up new opportunities, for the installer and the user.






Why use a different motor to move Venetian blinds? Thanks to the development of a specific tilter for tubular motors and the development of dedicated software, we have created a new practical and functional system.







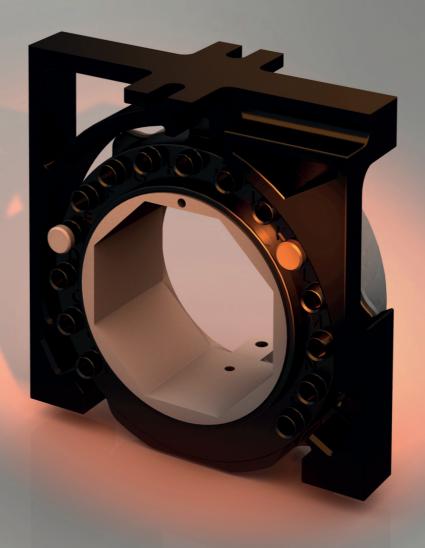

That is how DOGE was born.

A tilter specifically designed for use with tubular motors in the movement of Venetian blinds.







# More speed and power

The use of tubular motors allows greater torque availability (6, 15, 25, 40 Nm) to control even large Venetian blinds and make it more comfortable to close, open and orient the slats.



## More precision

Shaft rotation at 17 rpm ensures higher linear speed for maximum opening and closing. The supersensitivity function in the 6 and 15 Nm motors protects the system from damage to the texband.



### More setting options

The  $\emptyset$  60 tilter is equipped with movable pegs that can be configured up to 180°; the software specifically created for the DOGE system motors ensures maximum precision for slat inclination in all programming phases and in daily use.



### More convenience

The DOGE system is based on the identical standards and components as the roller shutter systems: thanks to the same type of installation, it is thus possible to realise a single system for roller shutters and Venetian blinds on the building site, with all the advantages in terms of optimisation of devices and management using the same controls.




# More privacy

In combination with the WindTec wind sensor, DOGE detects excessive wind and, thanks to its privacy function, protects people privacy by automatically setting the slats to a 45° angle, preventing damage to the blinds without raising them completely.



### More comfort

The DOGE system's silent (only available on 6 and 15 Nm versions) motor gearbox and the tilter's spring-loaded steel brake make opening, closing and tilting of the slats quieter and more comfortable, allowing you to control room brightness and privacy without the annoyance of noise.

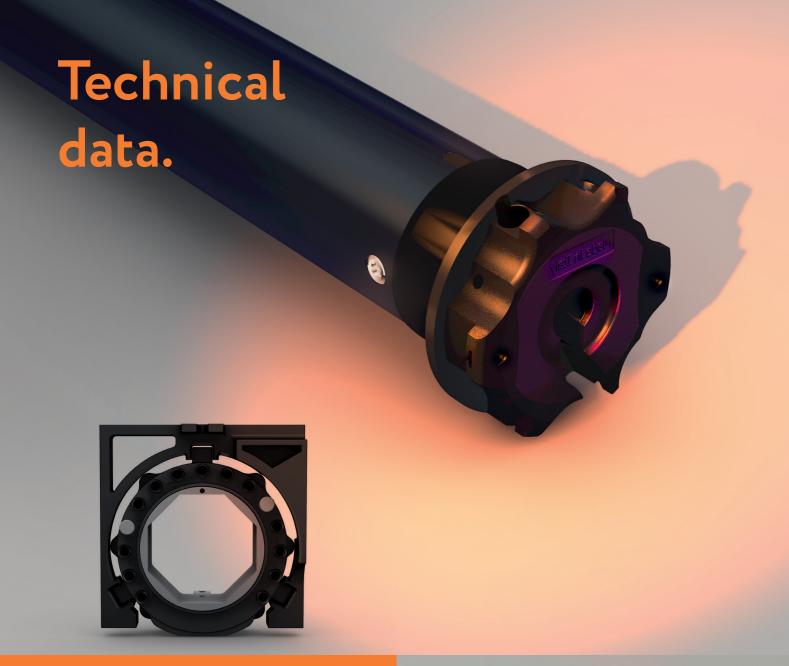



## Tilter

- Available version for 6 mm and 8 mm tape.
- Left and right-hand installation.
- Stainless steel spring brake.
- Can be mounted on both upwards and downwards opening boxes.
- Supplied with pre-fitted cables.



Wall-mounted remote control, shallow and square design that can be inset into the wall.



Line of practical and essential remote controls, customisable in six colours.







CHERUBINI Iberia S.L.
Avda: Unión Europea 11-H
Apdo: 283 P. I. El Castillo
03630 Sax. Alicante / España
Tel. +34 966 967 504
Fax +34 966 967 505
info@cherubini.es
www.cherubini.es

### CHERUBINI France SAS

ZI Du Mas Barbet 165 Impasse Ampere 30600 Vauvert / France Tel. +33 466 77 88 58 info@cherubini.fr www.cherubini.fr

### CHERUBINI Deutschland GmbH

Siemensstrasse, 40 53121 Bonn / Deutschland Tel. +49 (0) 228 962 976 34 - 35 Fax +49 (0) 228 962 976 36 info@cherubini-group.de www.cherubini-group.de

### CHERUBINI Türkiye

Ritim Istanbul
D-100 Güney Yanyolu
Cevizli Mahallesi, Zuhal Caddesi
34846 Maltepe - Istanbul / Türkiye
Tel/Fax +90 (0) 216 515 6287
info@cherubini.com.tr
www.cherubini.com.tr

DISTRIBUTOR