


CHERUBINI
tocco italiano dal 1947

CLIMA PLUS RX



For all types of adjustable shutters,
both for drop types and for coupling types.

“The most stimulating feature of our work is designing and developing solutions today that will become the standards of tomorrow.”





Clima Plus RX



For all types of adjustable shutters,
both for drop types
and for coupling types.

➤ **Motors with electronic limit switch, built-in receiver and wire control.**

➤ **Tilting setting.**
The Clima Plus RX range has been designed to activate all types of adjustable shutters.

The 5 programmable tilting options are designed to control all types of shutters with adjustable slats on the market - both drop system and coupling system types.


➤ **Specific functions:**

- Setting possible with remote control or wired switch.
- Compatible with most home automation systems on the market.
- Manual and semi-automatic adjustment of the limit switch.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorizing an intermediate position.



Clima Plus RX

- > Possibility to set the tilting type

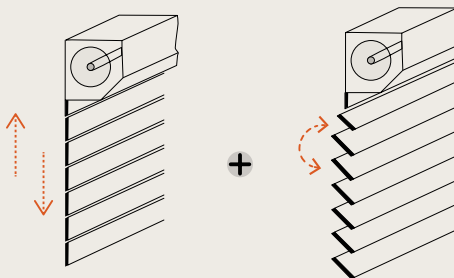


- > Manual and semi-automatic adjustment of the limit switch

- > Protection against freezing




- > Obstacle detection on both directions, sensitivity setting on 3 levels possible

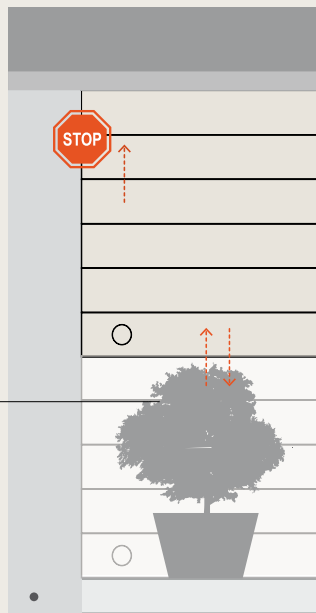



> Setting possible with remote control or wired switch

> Possibility of memorizing an intermediate position

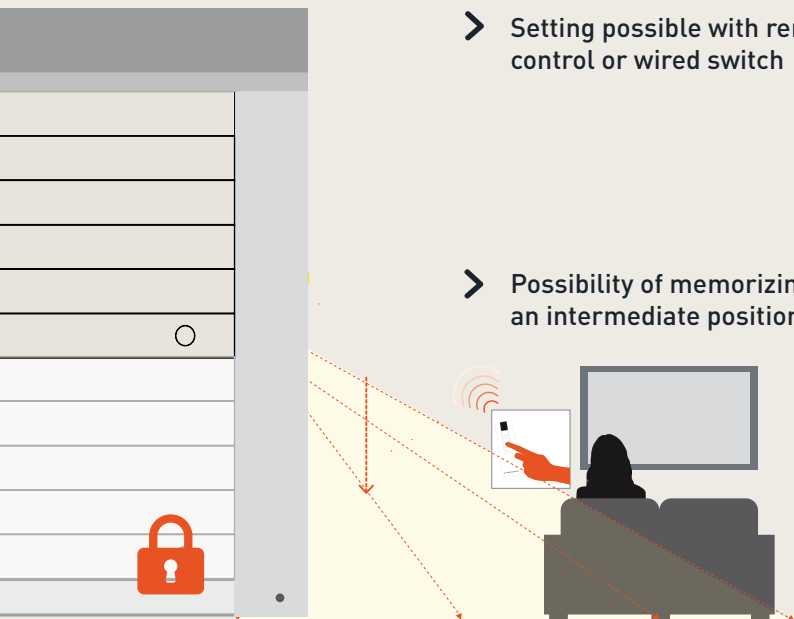

CLICK!



> **Highest level of anti-burglary security.**
The Secureline system permits motor reset only through the auxiliary cable, which is not accessible from outside the home.


Clima Plus RX

Main characteristics

Ø45

Code	Head	Torque	Speed	L (mm)	Certifications
AED45101200	Plastic material	10 Nm	12 rpm	546	CE
AED45151200	Plastic material	15 Nm	12 rpm	546	CE
AED45251200	Plastic material	25 Nm	12 rpm	546	CE
AED45321200	Plastic material	32 Nm	12 rpm	586	CE
AED45401200	Plastic material	40 Nm	12 rpm	586	CE
AED45501200	Plastic material	50 Nm	12 rpm	586	CE


Dimensions

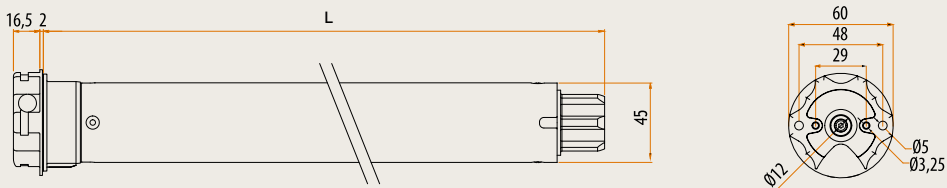

Ø58

Code	Head	Torque	Speed	L (mm)	Certifications
AED58081200	Zama	85 Nm	12 rpm	646	CE
AED58101100	Zama	100 Nm	11 rpm	646	CE
AED58121100	Zama	120 Nm	11 rpm	646	CE

Dimensions

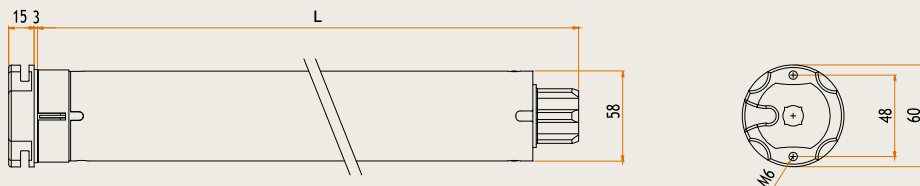

Compatible systems

Clima Plus RX

All Cherubini remote controls


Domotic transmitter

Domotic RX receivers

DOMI

Blue Bus / Blue Bus RX

Motor wire



BROWN - PHASE

WHITE - WIRED SWITCH

BLUE - NEUTRAL

YELLOW - GREEN 

CHERUBINI

tocco italiano dal 1947

CHERUBINI S.p.A.

Via Adige 55
25081 Bedizzole (BS) / Italy
Tel. +39 030 6872.039
Fax +39 030 6872.040
info@cherubini.it
www.cherubini.it

<http://www.linkedin.com/company/cherubini-spa>
<http://www.facebook.com/CherubiniSpa/>
<http://www.youtube.com/user/CherubiniSpa>



CHERUBINI France S.a.r.l.

ZI Du Mas Barbet
165 Impasse Ampère
30600 Vauvert / France
Tel. +33 466 77 88 58
Fax +33 466 77 92 32
info@cherubini.fr
www.cherubini.fr

CHERUBINI Iberia S.L.

Avda.Unión Europea 11-H
Apdo.283 - P.I. El Castillo
03630 Sax. Alicante / Spain
Tel. +34 966 967 504
Fax +34 966 967 505
info@cherubini.es
www.cherubini.es

CHERUBINI Deutschland GmbH

Siemensstrasse 40
53121 Bonn / Germany
Tel. +49 (0) 228 962 976 34 - 35
Fax +49 (0) 228 962 976 36
info@cherubini-group.de
www.cherubini-group.de

CHERUBINI DongGuan Ltd

Add.: No.4 Building,
BaoMa Road - ShuiBian
HengLi - DongGuan / China
Tel. +86 (0) 769 8337 3981
Fax +86 (0) 769 8337 2896
info@cherubini.cn
www.cherubini.it

CHERUBINI Türkiye

Ritim Istanbul
D-100 Güney Yanyolu
Cevizli Mahallesi, Zuhul Caddesi
34846 Maltepe - Istanbul / Turkey
Tel/Fax +90 (0) 216 515 6287
info@cherubini.com.tr
www.cherubini.com.tr